




## SECUMAX COMBI MDP

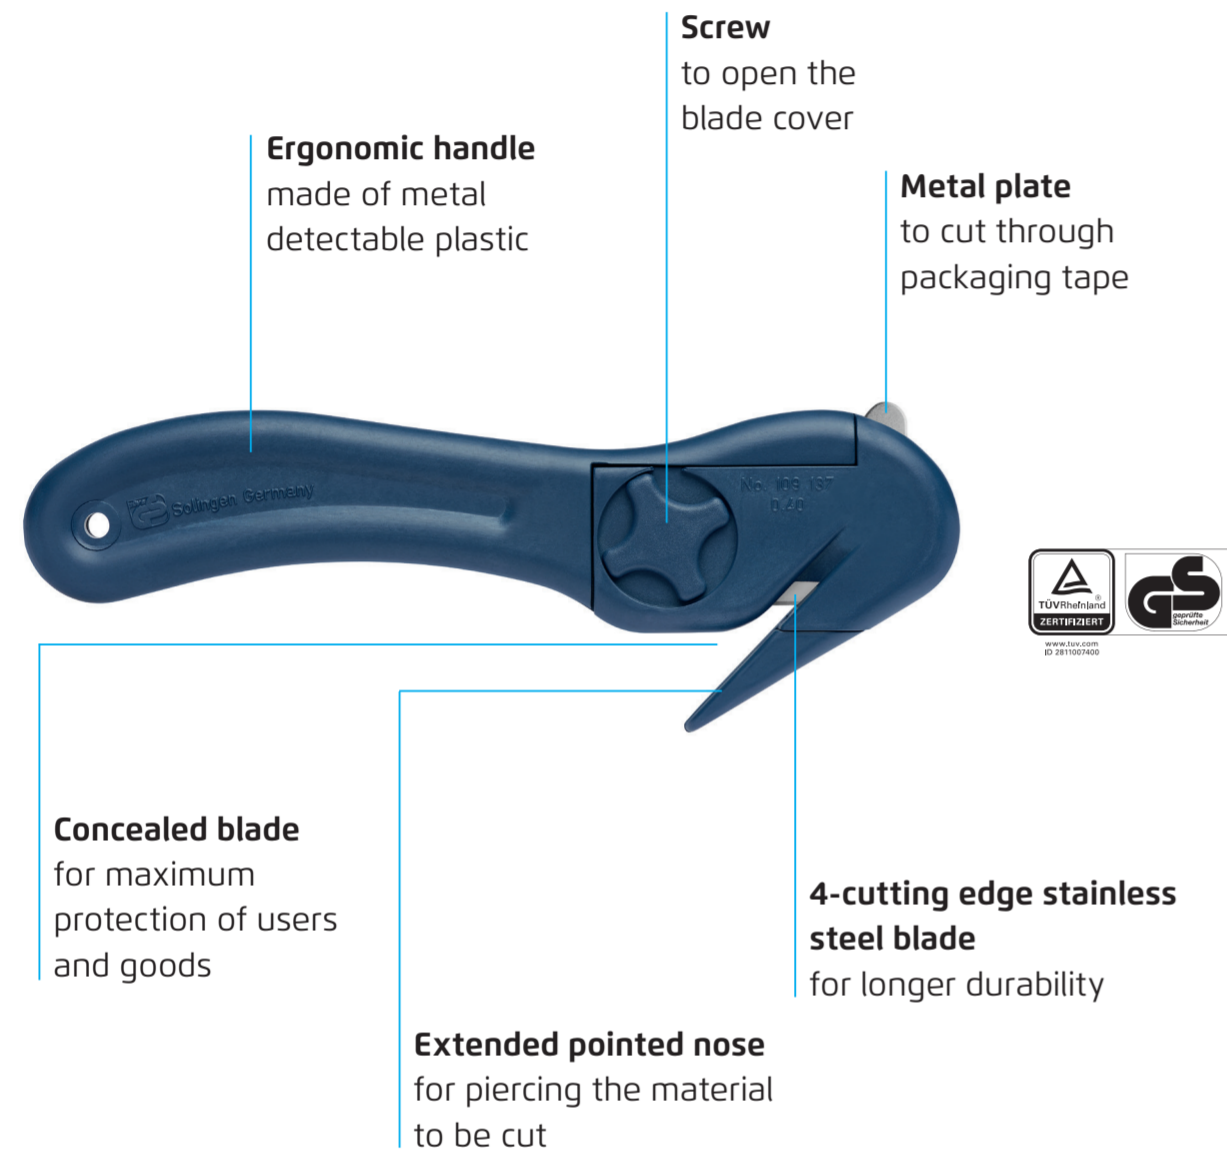


### USAGE

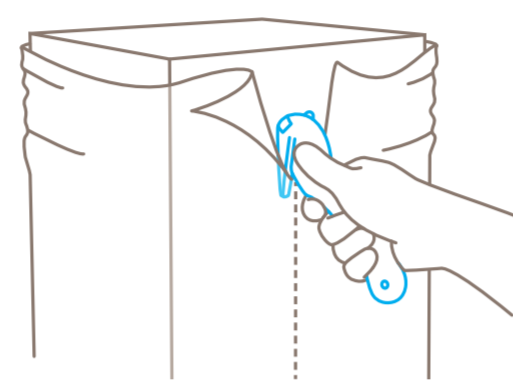

Use the pointed nose to **pierce** the material to be cut. You can also use it to guide the cut.

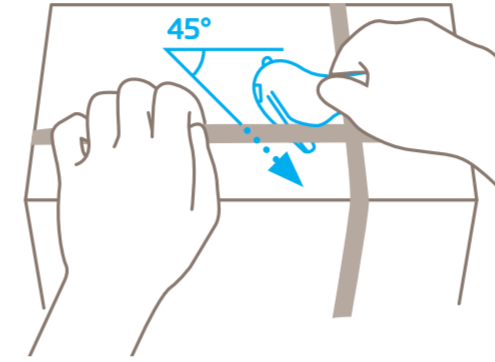


For best results, cut plastic strapping band **diagonally** (at a 45° angle).

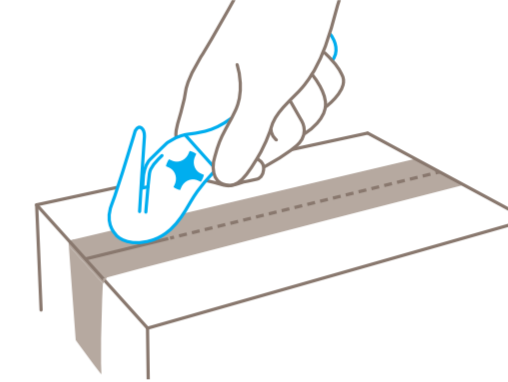


To use the **adhesive tape cutter**, turn the cutting tool around by 180 degrees.


### BLADE CHANGE

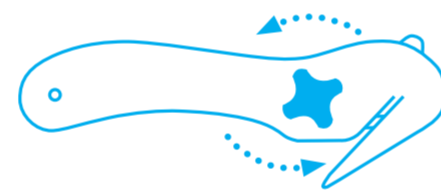


To access the blade, **manually** loosen the screw.

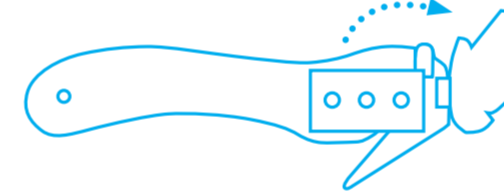

You can now **lift up the blade cover** and either reverse or replace the blade.

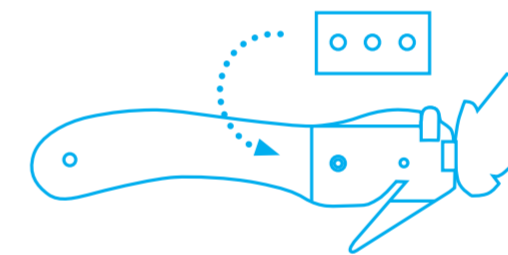


Re-insert the blade **exactly** over the locating lugs and thread.

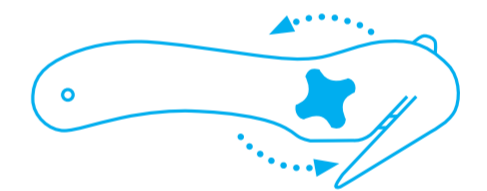


Re-close the blade cover and **manually** screw tight.

### PROTECTION OF USER

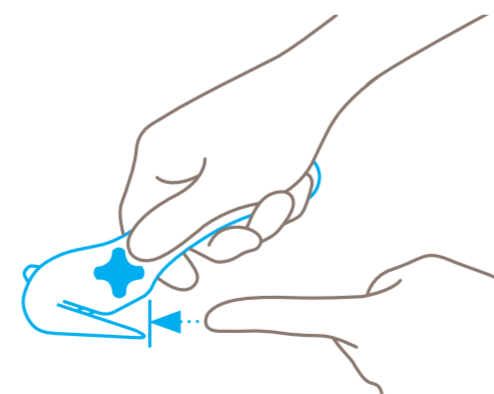


The concealed blade provides a maximum degree of **protection from cut injuries**.

### PROTECTION OF GOODS

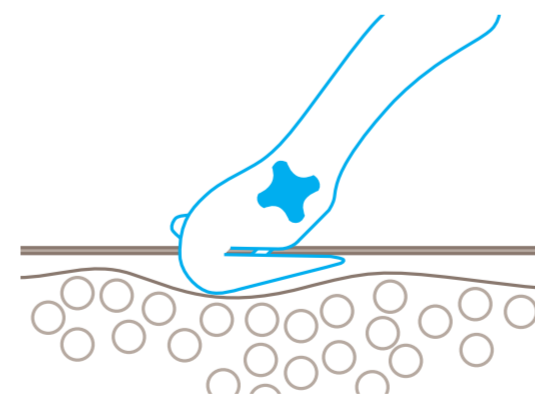


The concealed blade **will not get into contact with your goods** either.

### DISPOSAL

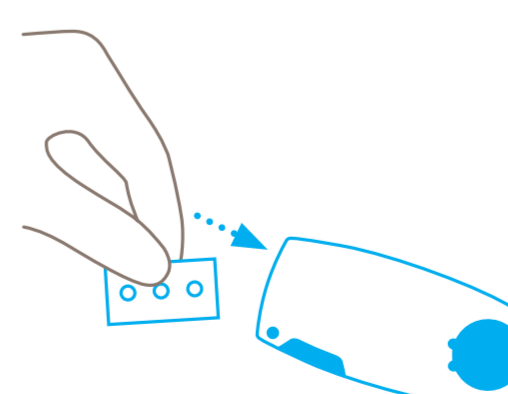

Your **SAFEBOX** is the best place to store **used blades**.

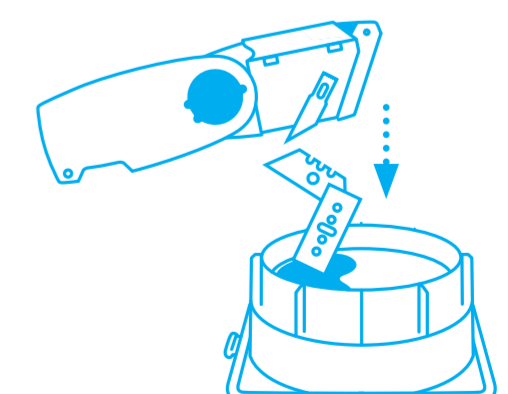

When the **SAFEBOX** is full, **empty all contents** into your **USED BLADE CONTAINER**.

**Please note:** To ensure your product always functions flawlessly, regularly remove any impurities. For additional safety, we recommend wearing gloves.